
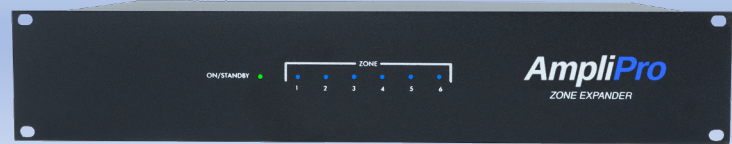


AmpliPro

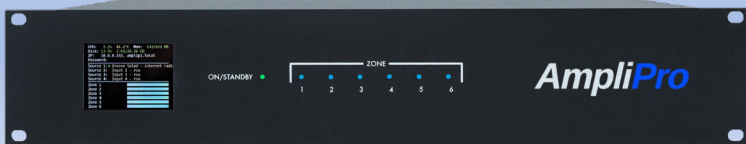

AmpliPro® Multi Zone Audio Streaming System

The AmpliPro® multi zone audio system provides a complete, open-source platform for audio streaming, distribution, and amplification. The AmpliPro main unit can play up to four simultaneous stereo audio streams to up to six stereo zones. Real-time configuration of the system is possible through the self-hosted web app or its underlying REST API. The system is expandable to 36 stereo zones using AmpliPro Zone Expander units. The AmpliPro streamer unit provides up to four simultaneous line level stereo audio stream outputs. The AmpliPro system is compatible with existing smart home installations using the included drivers.

Stream directly

- Pandora
- Internet Radio
- Airplay 1 / 2
- FM Radio
- Spotify
- Bluetooth
- DLNA
- Logitech Media Server

Coming soon:

- TIDAL
- TuneIn Radio
- Amazon Music




Assembled in the USA

AmpliPro® is proudly assembled in the USA at our in-house electronics factory in metro Detroit

The AmpliPro Streamer 4 adds streaming audio to any multi zone audio system. A Streamer 4 unit is capable of streaming up to 4 simultaneous audio streams from a variety of sources, including:

- Internet Radio
- FM Radio*
- Bluetooth*
- Logitech Media Server
- Pandora
- Airplay 1 / Airplay 2
- Spotify
- DLNA

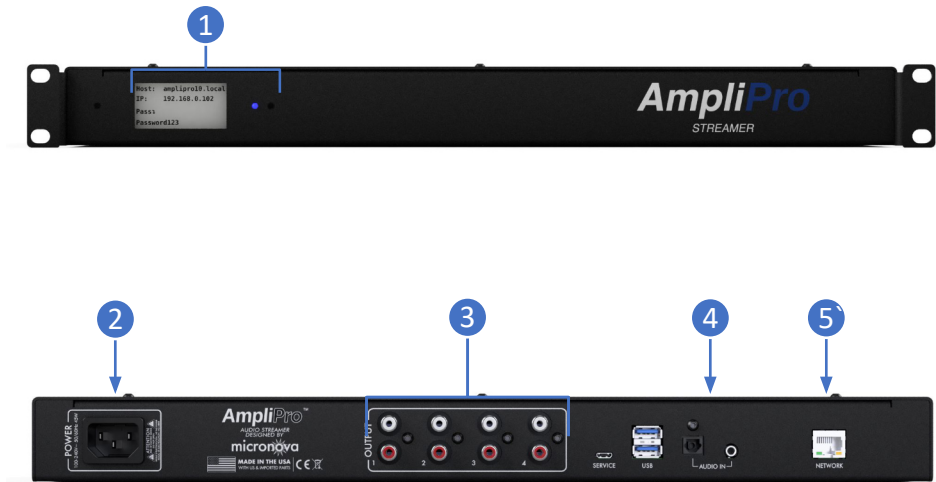

*Requires additional USB hardware dongle

ITEM	DESCRIPTION
1. System Status • Power LED • E-Ink Display	2.13", 250 x 122 pixel user-configurable E-Ink display. Default configuration shows network status and connection info: Host / IP / User / Password
2. Power • IEC 60320 C14 Inlet	100-240 VAC 50-60Hz Maximum input 45W
3. Outputs • 4 Stereo Analog RCA Preamp Outputs	Max output level: 0.78 VRMS (-2.1dBV) Ch 1 : up to 32-bit 384 kHz DAC output Ch 2-4 : up to 16-bit 48 kHz DAC output
4. Digital Inputs A. 2 USB 2.0 - B.1 Optical TOSLINK Input[†] 1 3.5mm Analog Input Digitally Sampled[†]	A. Can be used for FM Radio receiver or Bluetooth dongle B. PCM, 48 kHz, 16-bit 3.5mm input can be digitally mixed into other sources (announce / PA mode) [†] Only one of the optical or 3.5mm inputs can be used at the same time
5. Network • 1 RJ45 Jack	100Mbps Ethernet
Dimensions	1U 19" rackmount 6" D x 19" W x 1.75" H Weight: 5 lbs