



SKU : PIX50BRI


KEY FEATURES

- 50 RGB Pixels – 5V – TLS3001 (12 bit)
- 2 Year warranty – engineered for high durability
- Waterproof IP68 rated connectors
- Fast setup time when paired with Advatek's weatherproof PixLite series
- High speed camera safe (1000+ Hz PWM rate)

PHYSICAL

Mounting LED Diamenter.....	12mm/0.5"
Mounting Drill Hole.....	12.5mm
Mounting Plate thickness.....	<2mm
Leader cable length.....	2m/6'7"
Length	5m/16'4"
Pixel to Pixel Cable Length	100mm/4"
Weight.....	0.4kg
Wire gauge.....	18AWG
Operating temp.....	-40°C to +80°C

Connector: Advatek 4 pin Female Waterproof IP68

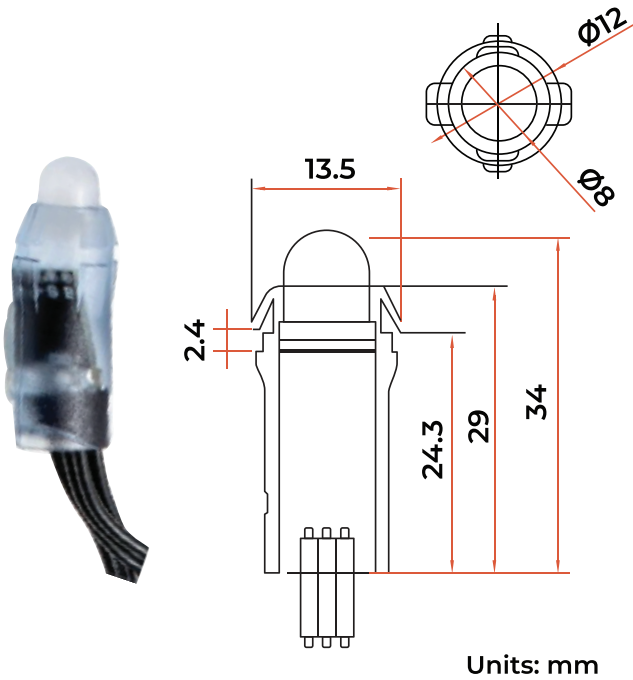

Units: mm



PixLite® Bright Strings

5V - TLS3001 (12 BIT RGB)

PIXELS

Total Pixels	50
Pixel Type	TLS3001 (12bit RGB)
Viewing Angle	180 degrees

POWER

Input Voltage	5V DC
Rated Power	16W

OTHER

Outdoor Rating	IP68
Lifespan	50,000 Hours
Warranty	2 year



COMPATIBLE PRODUCTS

PixLite 16 Mk2 Plug & Play



2.5m or 5m Extension Cables



Male Pigtales 8 Pack



Male Field Installable Connector 8 Pack



Get the latest datasheet, user manuals, firmware updates,
and more from www.advateklights.com

support@advateklights.com

ADVATEK

PixLite® is a registered trademark